




ANEX[®]
GARD
****USA BASED****



PAINT PROTECTION FILM BROCHURE

Product Structure

ANEX GARD paint protection film is one of the most advanced paint protection films on the market. Available in different thicknesses to offer you the protection you need for exterior and interior surfaces. It is virtually invisible and provides protection from everyday damages including scuffs, scratches, chips and more, which makes it easy to keep your car's finish looking like you just drove off the lot.

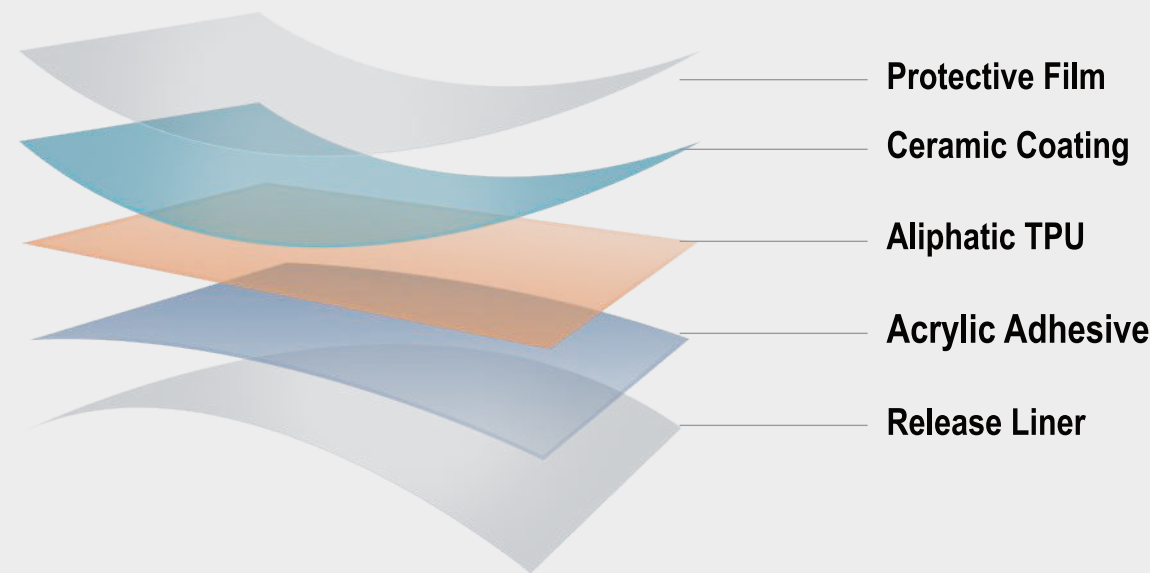

Protect Paint From Debris

ANEX GARD provides superior, long-lasting protection from weather, abrasion, debris, and more.



01

Self-Healing Topcoat

ANEX GARD will self-heal slight scratches & swirl marks with a light heat application to the film surface.



02

Non-Yellowing

ANEX GARD proprietary film formulation will not yellow from UV exposure, ensuring protected areas are nearly invisible.



03

Discoloration & Stain Resistant

ANEX GARD is stain resistant & will maintain clarity under the harshest conditions, protect your car paint from spots or splotches from contaminants.



04

Easy to Remove

ANEX GARD adopts acrylic adhesive. It's easy to remove the film whenever you're ready, without damage to the vehicle.



05

Quality Guaranteed

ANEX GARD warranty professionally sold and applied ANEX GARD Paint Protection Film against cracking, bubbling or yellowing in warranty period.



06

CLASSIC SUPER GLOSS



MATERIAL ORIGIN	PRODUCT THICKNESS	LAYER THICKNESS	COATING THICKNESS	URETHANE THICKNESS
USA	185±15 (um)	50±15 (um)	10±15 (um)	150±170 (um)
GLUE THICKNESS	LINER THICKNESS	ELONGATION AT BREAK	WARRANTY	
22±5 (um)	75±5 (um)	≥250%	3 YEARS	

BLACK GLOSS



MATERIAL ORIGIN	PRODUCT THICKNESS	LAYER THICKNESS	COATING THICKNESS	URETHANE THICKNESS
USA	195±10 (um)	50±5 (um)	15±15 (um)	160±5 (um)
GLUE THICKNESS	LINER THICKNESS	ELONGATION AT BREAK	WARRANTY	
20±5 (um)	75±5 (um)	≥300%	5 YEARS	

CLEAR MATTE



MATERIAL ORIGIN	PRODUCT THICKNESS	LAYER THICKNESS	COATING THICKNESS	URETHANE THICKNESS
USA	195±10 (um)	-	15±5 (um)	160±5 (um)
GLUE THICKNESS	LINER THICKNESS	ELONGATION AT BREAK	WARRANTY	
20±5 (um)	75±5 (um)	≥300%	5 YEARS	

PLUS SERIES

SUPER GLOSS



MATERIAL ORIGIN	PRODUCT THICKNESS	LAYER THICKNESS	COATING THICKNESS	URETHANE THICKNESS
USA	195±10 (um)	50±5 (um)	15±5 (um)	160±5 (um)
GLUE THICKNESS	LINER THICKNESS	ELONGATION AT BREAK	WARRANTY	
20±5 (um)	75±5 (um)	≥280%	5 YEARS	

PRIME SEVEN

SUPER GLOSS



MATERIAL ORIGIN	PRODUCT THICKNESS	LAYER THICKNESS	COATING THICKNESS	URETHANE THICKNESS
USA	195±10 (um)	50±5 (um)	15±5 (um)	160±5 (um)
GLUE THICKNESS	LINER THICKNESS	ELONGATION AT BREAK	WARRANTY	
20±5 (um)	75±5 (um)	≥280%	8 YEARS	

ULTIMATE SUPER GLOSS



MATERIAL ORIGIN	PRODUCT THICKNESS	LAYER THICKNESS	COATING THICKNESS	URETHANE THICKNESS
USA	210±15 (um)	50±5 (um)	10±5 (um)	180±5 (um)
GLUE THICKNESS	LINER THICKNESS	ELONGATION AT BREAK	WARRANTY	
20±5 (um)	75±5 (um)	≥320%	10 YEARS	

ANEX GARD Warranty

The ANEX GARD warranty applies to all ranges of film products (excluding accessories) only when used, handled, and installed. This warranty begins on the purchase date of your film installation (with the installer invoice required as proof). You must verify and ensure the suitability of any warranty information with respect to the specific product, application, use and care of your ANEX GARD product.



What is considered as acceptable claim?

ANEX GARD will cover defects such as: cracking, yellowing, discoloration, peeling, delaminating, degumming, bubbling are considered as acceptable claim.

The following are not covered by the warranty.

- 01** At the time of installation, products with known or evident manufacturing flaws were installed. It is the installer's responsibility to inspect the items prior to installation for any defects.
- 02** Improper cleaning products and/or used.
- 03** Not follow ANEX GARD guidelines or recommendations.
- 04** Incorrect washing procedures, automated car washes, or the use of inappropriate or harmful wash or cleaning.

Product Care Guide

ANEX GARD Paint Protection Film always give your car best protection. To ensure the product performance, please follow these instructions below:



Do not wash the car within 72 hours after installation.



Any disturbance may interfere with the curing process because the moisture between your car's paint surface and the film is still evaporating and the film has not yet adhered to the surface well.

Keep clean.



Paint Protection Film is porous. This means that if dust and other contaminants are left on for long, they can contaminate it and make it dull over time. To prevent this, wipe off any fuel spills immediately or wax ceramic coating on PPF's surface if possible, ensure not include corrosive elements, which will damage your film, including its self-healing capabilities.

Avoid products from aggressive chemicals.



The detailing products with corrosive or abrasive chemicals will damage or reduce PPF efficacy. Products that should be averted include tar and bug removers, clay cleaners and degreasers among other harmful products.

Remove bird droppings, bug splatter, etc. immediately.



Bird droppings, bug splatter, tree sap, and other natural contaminants that are acidic should not be left on the film for long. Such contaminants can quickly degrade the PPF and reduce its shine. Soften difficult contaminants, like tree sap, by soaking them for several minutes with hot, soapy water. Then, rinse thoroughly and dry. Do not use rough scrubbing or abrasive tools, which will scratch the film.

Park your car in an enclosed location without sunlight.



Store your wrapped vehicle indoors, in a shaded area, or under a cover whenever possible. Storage will help preserve and protect the film from heat and UV exposure.

Hand washing is best.



Hand wash your vehicle if possible. If you must send it through the car wash, avoid using a pressure washer or high-pressure water source near the edges of the film. Or it can cause the lifting or damage of the film.



WWW.ANEXGARDFILM.COM